

254x89mm LKA25489
Motor structure: Cage motor

Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A

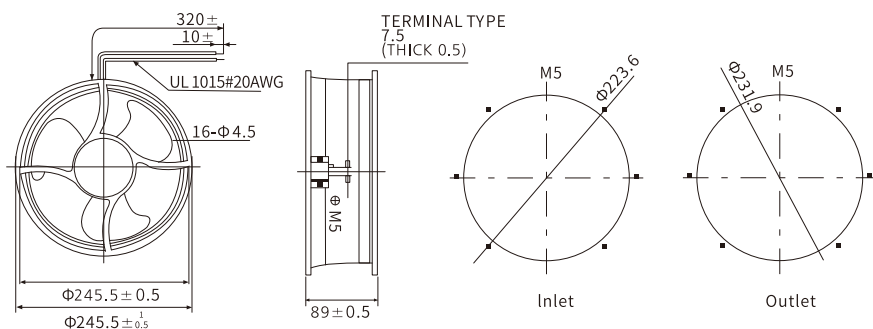
Material: Fan blade: PBT, 3 impeller

Bearings: Ball bearings

Motor life: 50000 hours

IP42
CE


-30 +80
°C

DIMENSION (mm)


Model	Bearing type	Voltage (V)	Freq (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m ³ /h)	Noise (dB)
LKA25489.115	Ball	100/125	50/60	0.8	50/52	2500/2600	816/880	68
LKA25489.230	Ball	200/240	50/60	0.4	50/52	2500/2600	816/880	68

280x280x80mm LKA28080
Motor structure: Cage motor

Dielectric strength: AC 1500V, at 0.5mA, 50/60Hz

Insulation level: Class A

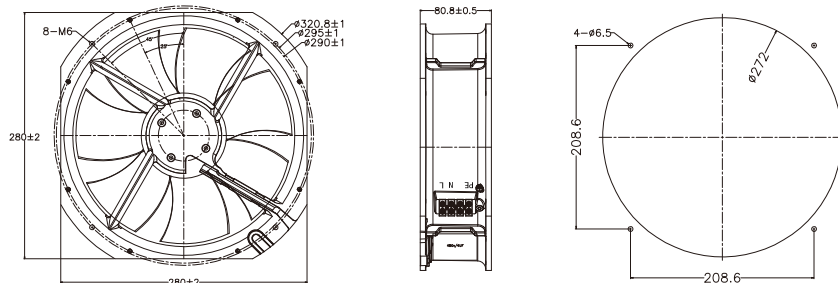
Material: Fan blade: Cold rolled plate, 7 impeller

Bearings: Ball bearings

Motor life: 50000 hours

IP42
UL
CE


-30 +65
°C

DIMENSION (mm)


Model	Bearing type	Voltage (V)	Freq (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m ³ /h)	Noise (dB)
LKA28080.115	Ball	100/125	50/60	1.00/1.10	110/150	2550/2700	1785/1870	69/71
LKA28080.230	Ball	200/240	50/60	0.55/0.65	110/150	2550/2700	1785/1870	69/71