
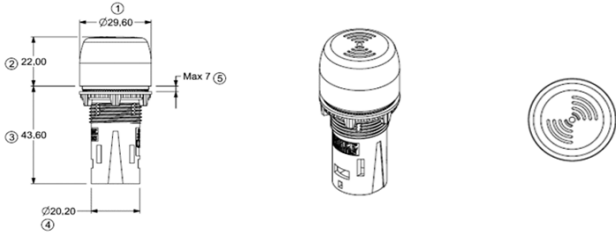
	ESBEE ELECTROTECH LLP	Format No. : IMS/DND/IF08
	INTEGRATED MANAGEMENT SYSTEM	Issue Date : 01/05/2024
	Design Sheet /Design input sheet:FLASHER BUZZER	Rev. Date : 01/05/2024 Rev. No : 00
Product :		
Product Specifications		Date: 02/08/2024
ELECTRICAL		
1	Supply Voltage	12V AC/DC, 24V AC/DC, 48V AC/DC, 110V AC, 230V AC +/-10%
2	Input Current	25-30mA
3	LED	SMD
4	LED COLOUR	Red/ Green/ Blue/ Yellow/ Amber
5	LED STATE	Intermittent
6	BUZZER STATE	Intermittent
7	FLASHING/BLINKING RATE	60 +/- 5 PULSES PER 1 MIN
8	SPL @ 1m	70-75dB
MECHANICAL		
9	Wire Termination capacity	Min 0.5 mm ² , 1.5 mm ² to 2.5 mm ² .
10	Screw and nut Torque	≤1 Nm
11	Outer dimension	29.6mmx65.6mm
12	Mounting dia	22.5mm
		
ASTHETICAL		
13	Housing Colour	Black
	Lens Colour	Polycarbonate
ENVIRONMENTAL REQUIREMENTS		
14	Operation temperature	-10 ~ 60 °C
15	Storage temperature	-10 ~ 65 °C
16	Air humidity	95% relative humidity at Ambient temprature
ECOLOGICAL REQUIREMENTS		
17	RoHS	Comply
STANDARD COMPLIENCE SPECIFICATION		
18	IP test at terminal	IP20 Comply
Prepared By: MEMBER - ENGG		Checked By : HOD - ENGG