

Lynx Gateway

- Serial protocol support for Modbus (RTU and ASCII) Master/Slave
- Network protocol support for Modbus TCP (Server/Client)
- Supports Raw Serial to Ethernet conversion with Telnet RFC2217
- Serial Interface support for RS232, RS422 and RS485 network
- Serial Baud rate: 300 bps to 115.2 Kbps
- Ethernet interface support: 10/100Mbps with Auto Negotiation
- Configurable using Embedded Web server and Application software
- Network Protocols: ARP, TCP/IP, HTTP, BOOTP, TFTP, ICMP, TELNET, DHCP, AutoIP
- Isolation between Communication Ports & Input Power supply



Ordering Information

Cat. No.	Description
25A11A0	12 - 24 VDC, Protocol Converter, Modbus TCP - Modbus RTU/ASCII
25B11A0	12 - 24 VDC, Serial to Ethernet Converter

Lynx Gateway



Cat. No.		25A11A0	25B11A0
Parameters			
Supply Voltage (≡)		12 - 24 VDC	
Supply Variation		-10% to +25%	
Power Consumption (Max.)		2 W	
Protocol Conversion		Modbus RTU / ASCII to Modbus TCP	N.A
Operation Mode		Modbus RTU / ASCII (Master / Slave), Modbus TCP (Server / Client)	Raw, Telnet
Configuration Management		HTTP Web Server and Application software	
Serial Interface	Number of Serial Ports	1	2
	Serial Interface	Port1: Screw terminals for RS232, RS422 and RS485 interface	Port1: Screw terminals for RS232, RS422 and RS485 interface, Port2: RJ11 for RS232 Interface
	Signals	RS232 : RXD, TXD, GND RS422 :TX+, TX-, RX+, RX-, GND RS485 : TX+ (D+), TX- (D-), GND	
	Serial Interface Selection	For Port1: Mode selection using RST switch with Mode LED indication	
	Serial Communication Parameters	Baud Rate : 300bps to 115.2Kbps	
		Data Bits : 7,8 ; Flow Control : None	
		Parity : Odd, Even, None	
	Fail safe resistor Terminating Resistor Isolation	Stop Bits : 1,2	
		4K7 Resistor Pull up (TX+) & Pull Down (TX-) on BUS	
LAN Interface	Port	RJ45, Ethernet 10/100 Mbps	
	LAN Isolation	1.5KVrms magnetic Isolation	
	Network Protocol's Supported	Protocols for Communication : TCP/IP, Modbus	Protocols for Communication : Raw, Telnet-RFC2217
		Standard Protocols used : HTTP, DHCP, AutoIP, UPnP, TCP, UDP, IP, ARP, ICMP, Protocols used for firmware updating : BOOTP, TFTP	Standard Protocols used : HTTP, DHCP, AUTOIP, UPnP, TCP, UDP, IP, ARP, ICMP, Protocols used for firmware updating : BOOTP, TFTP
	Isolation	1.5KVrms magnetic Isolation	
Feature		Mapping and Background Processing Data Block (BPD)	N.A
Configuration Software		Windows Based Software to Configure Ports as well as Selection of Protocol Driver	
Reset		Front Panel recessed , Loads Default Factory Settings & Serial Mode selection	
LED Indications		Serial TX and RX, LAN: LINK and Activity, Power ON, Error, Mode Selection Indication LED	
Operating Temperature		0°C to + 55°C	
Enclosure		Flame Retardant UL94-V0	
Dimension (W x H x D) (in mm)		72 X 90 X 58	
Weight (unpacked)		185 g	
Mounting		Base / DIN Rail	
Certification		 	

EMI / EMC

ESD	IEC 61000-4-2
EFT (On Supply Lines)	IEC 61000-4-4
EFT (On Communication Line)	Port-1 : IEC 61000-4-4
Radiated Susceptibility	IEC 61000-4-3
Surges (DC Power Ports)	IEC 61000-4-5
Conducted Susceptibility	IEC 61000-4-6
Voltage Dips & Interruptions (AC)	IEC 61000-4-11
Conducted Emission	CISPR 14-1
Radiated Emission	CISPR 14-1
Power Frequency Magnetic Field Immunity	IEC 61000-4-8


Environmental Compliance

Cold Heat	IEC 60068-2-1
Dry Heat	IEC 60068-2-2
Vibration	IEC 60068-2-6
Repetitive Shock	IEC 60068-2-27
Non-Repetitive Shock	IEC 60068-2-27


Lynx Gateway



MOUNTING DIMENSIONS (mm)

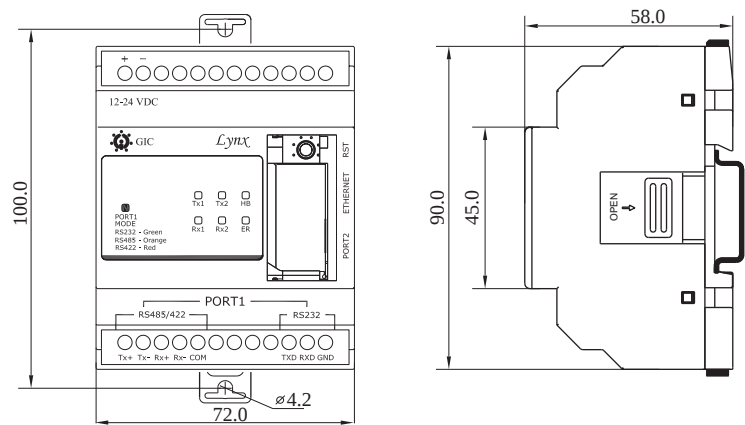

TERMINAL TORQUE & CAPACITY

 Ø 3.5...5.0 mm	Torque - 1.1 N.m (10 Lb.in) Terminal screw - M3.5
	Solid Wire - 2 X 0.2...2.5 mm ²
AWG	1 X 24 to 10